



FFXL Contractor Technical Information

Forward Facing XL Contractor LED Ribbon is used for general mood and feature lighting, whilst still conforming to environmental requirements and energy efficiency. Available in a range of colours and colour temperatures. All ribbon comes on 5m reels that can be cut to bespoke lengths.

The Contractor Range is designed to be the most cost effective solution for LED Ribbon usage.

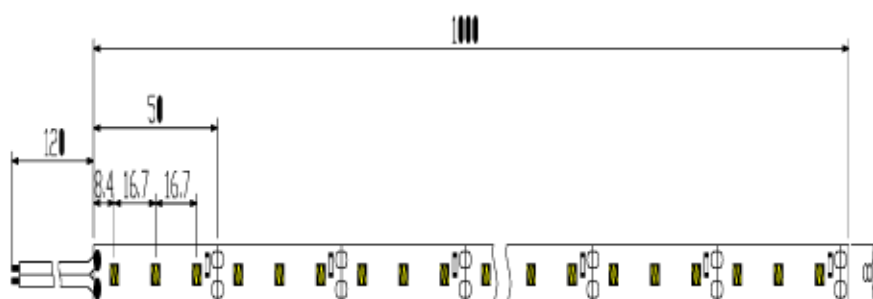

Real Watts	60W/5M
Voltage	DC 12V
Input Frequency	50/60Hz
Input Current	5A/5M
Lumen/LED	12 Lm/LED
Color Temperature	White, Warm White, Red, Green, Blue, RGB
Beam Angle	120°D
LED Chip	SMD 5050
LED Qty	300/5M
Driver	No
Protection Class	IP20/IP65
Body Material	Plastic Cover Back
Unit size	5 Mtr; Width: 10mm
Life Time	20000hrs
Outside using temperature	-25 ~50°C
Packing Method	5mtr roll/packing
Applicable Environment	Indoor Lighting, Used in Home down light, Stairwell lighting.

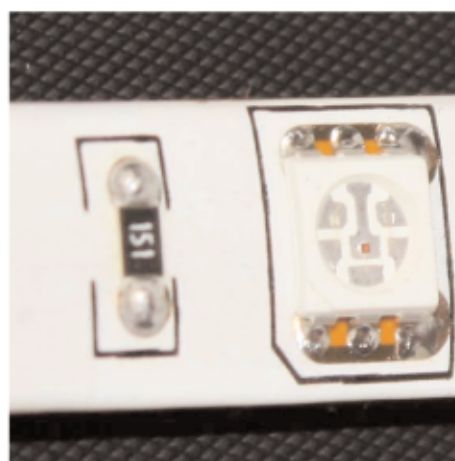

Dimming



12v Dimmer
with or without
Remote



0-10v Module
Use with 0-10v
System



DMX Module
Use with DMX
System

Ideals (GB) Limited
Unit 3 Brookside Centre
Sumpters Way
Southend
SS2 5RR



Tel: 01702 460855
Fax: 01702 460655

email: sales@idealsgb.co.uk
web: www.idealsgb.co.uk