
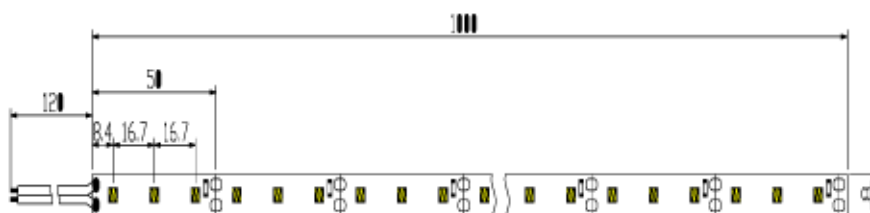


## FFML Contractor Technical Information

Forward Facing ML Contractor LED Ribbon is used for general mood and feature lighting, whilst still conforming to environmental requirements and energy efficiency. Available in a range of colours and colour temperatures. All ribbon comes on 5m reels that can be cut to bespoke lengths.

The Contractor Range is designed to be the most cost effective solution for LED Ribbon usage.

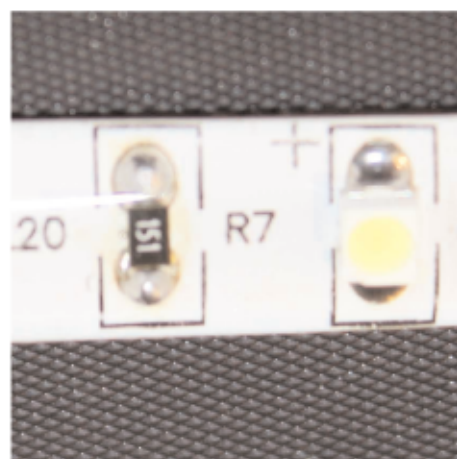

Real Watts	24W/5M
Voltage	DC 12V
Input Frequency	50/60Hz
Input Current	2A/5M
Lumen/LED	4:5
Color Temperature	White, Warm White, Red, Green, Blue
Beam Angle	120°D
LED Chip	SMD 3528
LED Qty	300/5M
Driver	No
Protection Class	IP20/IP65
Unit size	5 Mtr; Width:8mm
Life Time	20000hrs
Outside using temperature	-20 ~50°C
Packing Method	5mtr roll/packing
Applicable Environment	Indoor Lighting, Used in Home down light, Stairwell lighting.

### Dimming



12v Dimmer  
with or without  
Remote



0-10v Module  
Use with 0-10v  
System



DMX Module  
Use with DMX  
System

Ideals (GB) Limited  
Unit 3 Brookside Centre  
Sumpters Way  
Southend  
SS2 5RR



Tel: 01702 460855  
Fax: 01702 460655

email: [sales@idealsgb.co.uk](mailto:sales@idealsgb.co.uk)  
web: [www.idealsgb.co.uk](http://www.idealsgb.co.uk)