


FFML Standard Ribbon Technical Information

Forward Facing ML Standard Output LED Ribbon is used for general mood and feature lighting, whilst still conforming to environmental requirements and energy efficiency. Available in a huge range of colours and colour temperatures. All ribbon is available in bespoke lengths to meet exact project requirements.

Wattage Per Metre	4.3
IP Rating	65
Maximum Single Length	5m
LED Brand	Epistar 1210 Chip
Colours Available	Extra Warm White 2500-3000k Warm White 3000-3500k Natural White 4000-4500k Cool White 6000-6500k Red Blue Green Amber Violet Pink
RGB Available	No
Cut Points	Every 50mm / 3 LEDs
LEDs Per Metre	60
Lumens Output Per Metre	420 (Based on White)
Lumens Per Watt	97.7
Dimensions	8mm (W) x 3mm (H)
Beam Angle	Greater than 120 degrees
Lamp Life	50,000 + Hours
Fixing	3M Tape

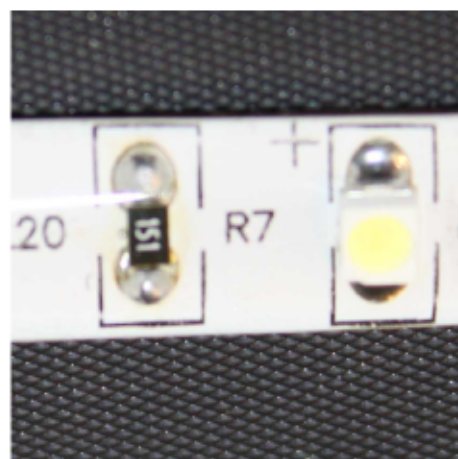

Dimming



12v Dimmer
with or without
Remote



0-10v Module
Use with 0-10v
System



DMX Module
Use with DMX
System

Ideals (GB) Limited
Unit 3 Brookside Centre
Sumpters Way
Southend
SS2 5RR



Tel: 01702 460855
Fax: 01702 460655

email: sales@idealsgb.co.uk
web: www.idealsgb.co.uk