


FFDML+ Superior Ribbon Technical Information

Forward Facing Superior Standard Output LED Ribbon is used for general mood and feature lighting where the high CRI output & Quality is essential, whilst still conforming to environmental requirements and energy efficiency. Available in a huge range of colours and colour temperatures. All ribbon is available in bespoke lengths to meet exact project requirements.

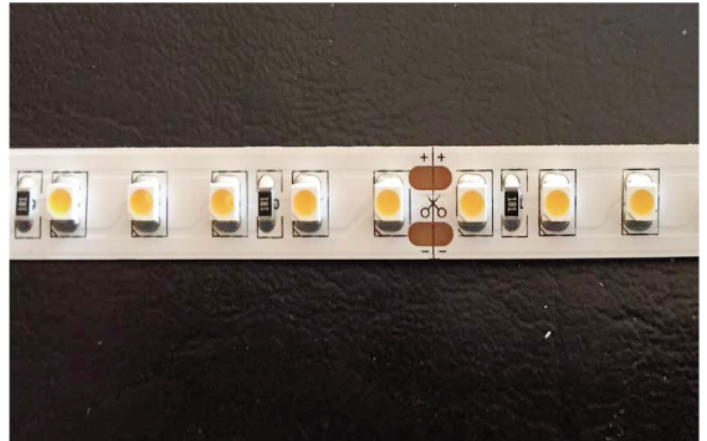

Wattage Per Metre	9.6
IP Rating	20 - 67
Maximum Single Length	5m
Chip Variety	3528
Voltage	DC12V / DC24V
LED Brand	Samsung
CRI	>90
Colours Available	Extra Warm White 2700k Warm White 3000k Natural White 4000k Cool White 6000k Colours - Please enquire
RGB Available	No
Cut Points	Every 25mm (12v) / 50mm (24v)
LEDs Per Metre	120
Lumens Output Per Metre	940 (Based on White)
Lumens Per Watt	98
Dimensions	10mm (W) x 3mm (H)
Beam Angle	Greater than 120 degrees
Lamp Life	50,000 + Hours
Fixing	3M Tape

Dimming



24v Dimmer
with or without
Remote



1-10v Module
Use with 1-10v
System



DMX Module
Use with DMX
System



Bluetooth
WiFi
Wireless



240v Mains
Dimmable
Drivers

Ideals (GB) Limited
Unit 3 Brookside Centre
Sumpters Way
Southend
SS2 5RR

Tel: 01702 460855
Fax: 01702 460655

email: sales@idealsgb.co.uk
web: www.idealsgb.co.uk